


MEGMEET

PLC


.....	1
.....	3
.....	5
.....	5
.....	5
.....	6
.....	7
.....	7
.....	8
.....	10
.....	12
.....	12
.....	13
.....	13
.....	14
.....	15
.....	16
.....	17
.....	18
.....	19
.....	20
.....	21
.....	22

1

1.1

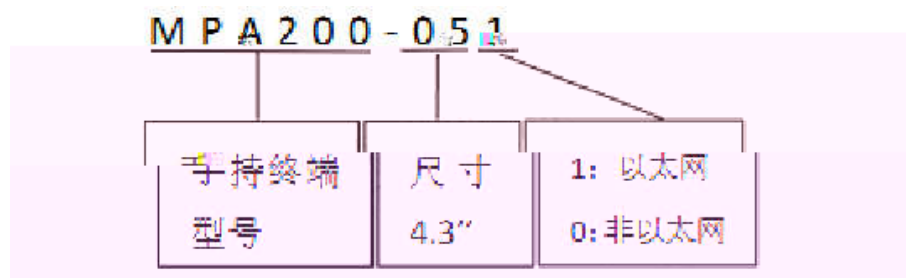

1.2

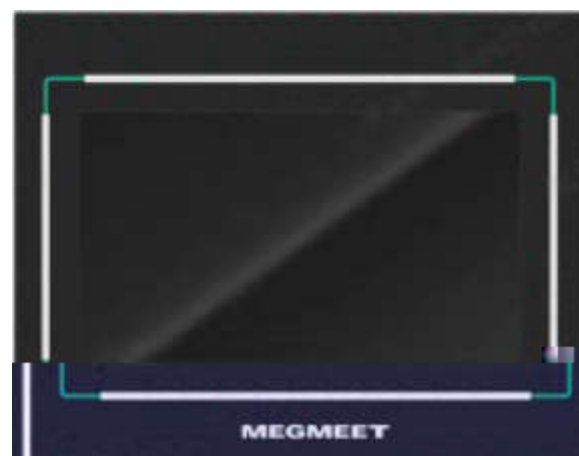


1.3





2


2.1 U

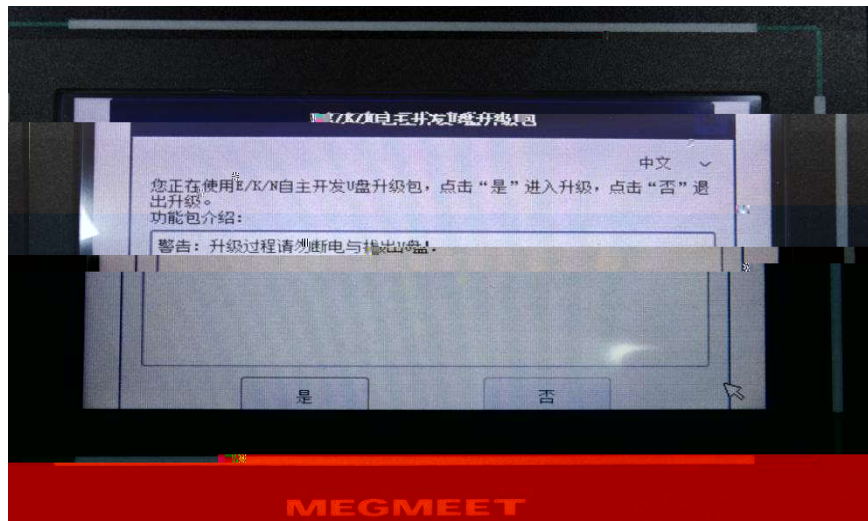



2.2

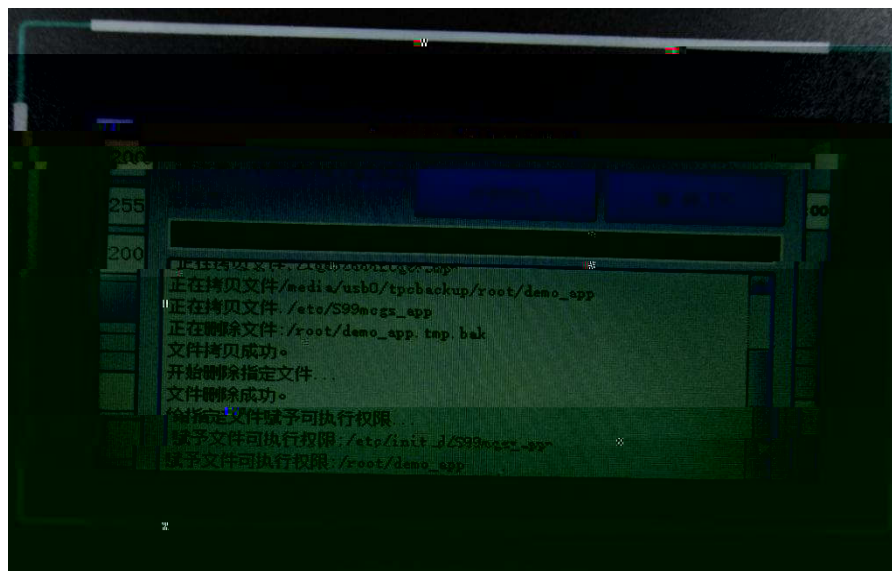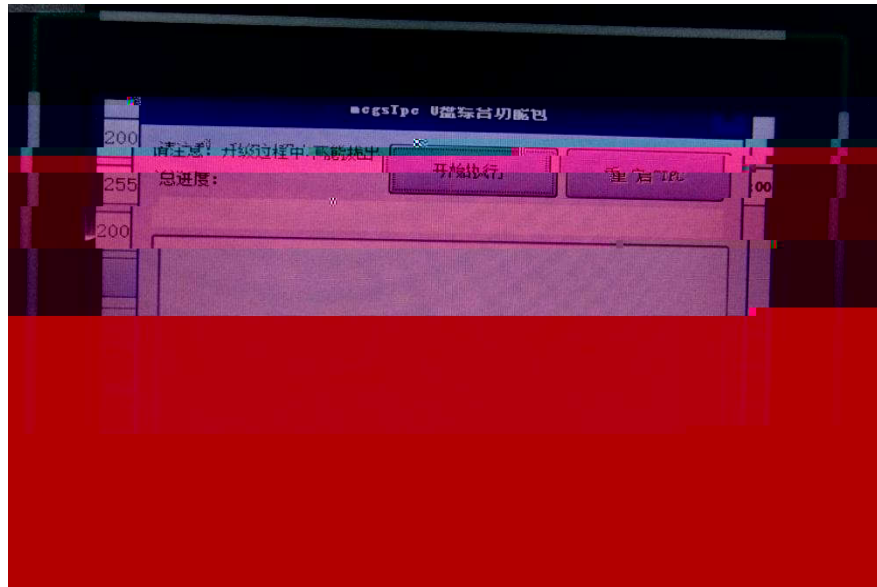

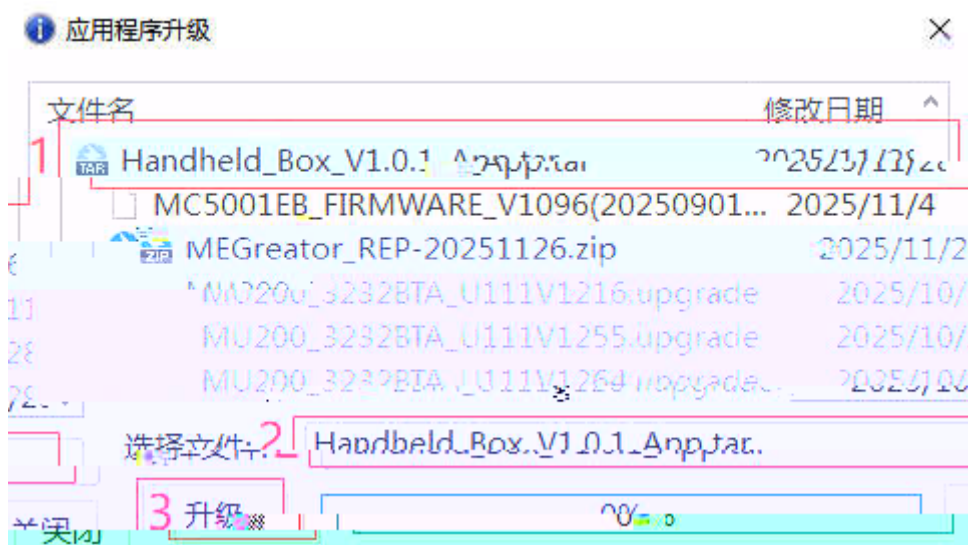

3

3.1



3.2 PLC

3.2.1



3.2.2 PLC

MEGMEET

未联机

11:35:44

⊗ 操作员

设备搜索

PLC信息

序号	名称	数据
1	CPU类型	
2	版本号	
3	当前扫描速率	
4	最小扫描速率	

读取PLC信息

退出

3.3

MEGMEET 未联机 13:37:24 新增

序号	程序名	剩余次数	修^
1	MU100_TEST(MU100_4040BTA)	100	2025_1
2	MU320简单测试程序(MU320_2424BBA)	99	2025_1
3	测试程序(MC5001EB)	96	2025_1
4	MC5001EB_Expand(MC5001EB)	31	2025_1

< >

选择程序:

下载 删除 旧


3.4

MEGMEET 未连接 15:37:32 操作员

数据导出设置

类型	起始地址	元件数量	选择	序号	数据名
M元件:	0	8000	☒	1	MC700E_202511...
S元件:	0	2000	☒	2	MU100_2025112...
C元件:	0	200	☒	3	MC5001FB_2025...
T元件:	0	500	☒	0%	
D元件:	0	10000	☒	导出 导入	
R元件:	0	10000	☒	删除 退出	

3.5

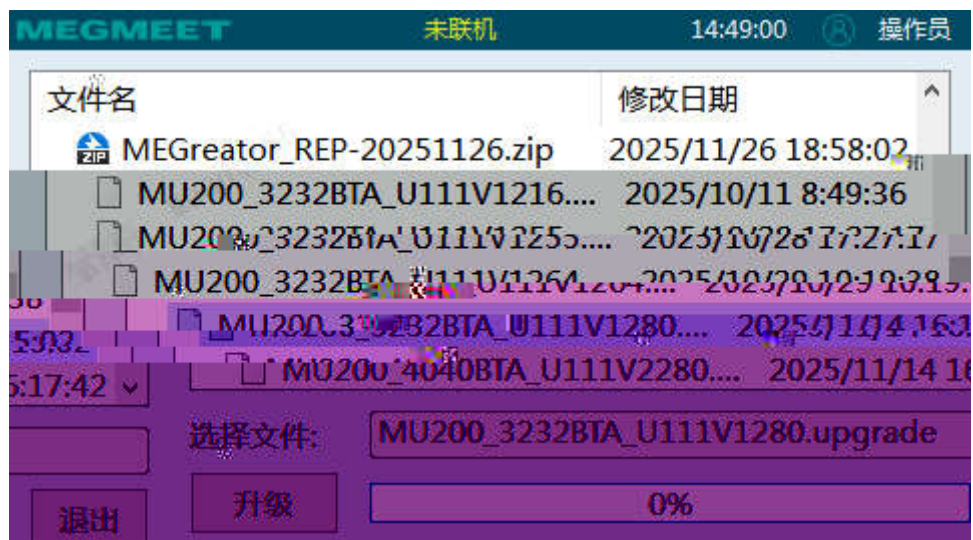

3.6

MEGMEET

未联机

14:17:12

Ⓜ 操作员

操作终端IP

IP地址

192.168.1.22

子网掩码

255.255.255.0

网关

192.168.1.1

设置

退出

3.7



3.8




The screenshot shows a software window with a title bar containing the text "MEGMEET", "未联机", and a timestamp "14:56:31" along with a user icon and the name "操作员". Below the title bar is a table with three columns: "序号" (Serial Number), "运行记录" (Operation Record), and "时间" (Time). The table contains five rows of data. Below the table are two buttons: "清空" (Clear) and "退出" (Exit).

序号	运行记录	时间
1	启动操作终端!!!	2025-12-02 10:3...
2	退出操作终端!!!	2025-12-02 10:2...
3	启动操作终端!!!	2025-12-02 10:0...
4	退出操作终端!!!	2025-11-27 20:3...
5	启动操作终端!!!	2025-11-27 19:2...

清空 退出

3.9

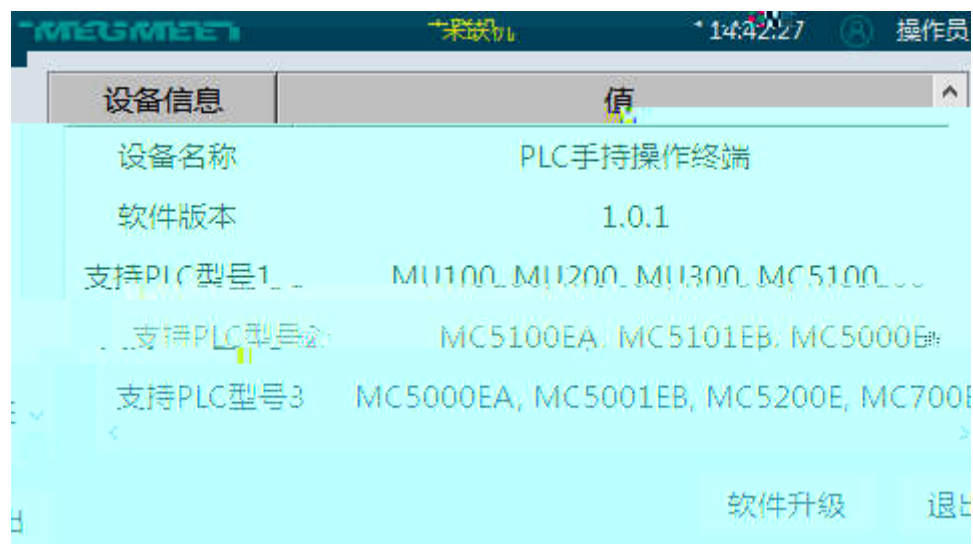

3.10

